

# IMMERSION THERMOSTATS AND DRY-BLOCKS



<b>Immersion thermostats. Analogue control</b>	<b>page</b>	<b>100</b>
<b>Immersion thermostats. Digital &amp; Touch screen control</b>	<b>pages</b>	<b>101 to 106</b>
<b>Circulating ultrathermostat</b>	<b>page</b>	<b>103</b>
<b>Circulating criothermostat</b>	<b>page</b>	<b>103</b>
<b>Bath circulators with thermostatic equipment</b>	<b>pages</b>	<b>104 to 105</b>
<b>Digital &amp; Touch screen control</b>		
<b>Immersion thermostat for baths</b>	<b>pages</b>	<b>105 to 106</b>
<b>Refrigerated units for baths</b>	<b>page</b>	<b>107</b>
<b>Water recirculators</b>	<b>page</b>	<b>107</b>
<b>Thermostat dry-blocks</b>	<b>page</b>	<b>108 to 109</b>
<b>Thermo shakers</b>	<b>page</b>	<b>109 to 110</b>

*"It is characteristic of science that the full explanations are often seized in their essence by the percipient scientist long in advance of any possible proof."*  
John Desmond



# THERMOSTAT BATHS AND IMMERSION THERMOSTATS

## Summary table of the different models

QUICK OVERVIEW




EQUIPMENT FOR STABLE AND PRECISE TEMPERATURE CONTROL.

Range	Model	Part No.	Control	Volume máx. litres	Stability °C	Set error °C	RS-232
+5 ... 100 °C	Termotronic II	3000389	Analogue	20	±0,2	-	No
+5 ... 150 °C	Digiterm-S-150	3000543	Digital $\mu$	20	to 150 °C ±0,05	±1	Yes
+5 ... 200 °C	Digiterm-TFT-200	3000544	TFT Touch screen $\mu$	20	to 200 °C ±0,1 to 100 °C ±0,05	±2	Yes
0 ... 100 °C	Digit-Cool	3001373	Digital $\mu$	20	to 100 °C ±0,05 to 0 °C ±0,05	±1	Yes
+5 ... 150 °C	Digiterm-S-150-20	3000548	Digital $\mu$	20	±0,05	-	Yes
+5 ... 150 °C	Digiterm-S-150-27	3000549	Digital $\mu$	27	±0,05	-	Yes
+5 ... 200 °C	Digiterm-TFT-200 20	3000550	TFT Touch screen $\mu$	20	±0,1	±2	Yes
+5 ... 200 °C	Digiterm-TFT-200 27	3000551	TFT Touch screen $\mu$	27	±0,1	±2	Yes
+5 ... 200 °C	Ultraterm-TFT-200	3000545	TFT Touch screen $\mu$	8	to 100 °C ±0,05 to 200 °C ±0,1	±1 ±2	Yes
-10 ... 100 °C	Frigiterm-TFT-10	3000546	TFT Touch screen $\mu$	8	to 100 °C ±0,05 to 0 °C ±0,05 to -10 °C ±0,1	±1	Yes
-30 ... 100 °C	Frigiterm-TFT-30	3000547	TFT Touch screen $\mu$	8	to 100 °C ±0,05 to 0 °C ±0,05 to -10 °C ±0,2	±1	Yes
+5 ... up to 90 °C	Interheater	6001491	Digital	20 l/min.	-	±1	No
Refrigerated coils							
-20 ... 20 °C	Frigedor	3000778	No controller	20	-	-	No
-20 ... 20 °C	Frigedor-Reg	3001214	Digital	20	±1,5	±1,5	No
THERMOSTATS DRY-BLOCKS							
Range	Model	Control	Blocks-1	Blocks-3	Blocks-4	Stability	
30 ... 200 °C	Tembloc	Digital $\mu$	7462200	-	-	±0,75 °C	With multiple adapters.
30 ... 200 °C	Multiplaces	Digital $\mu$	-	7471200	-	±0,75 °C	With multiple adapters.
FIXED 37 °C	Clinic-bloc	-	7001569	-	-	±0,5 °C	Capacity 20 tubes of 75 x 13mm. VAC.
FIXED 37 °C	Bio-bath	-	7001561	-	-	±0,5 °C	Capacity 15 cuvettes of 10 x 10mm.
+5 ... 60 °C	TRM-4	Digital $\mu$	-	-	5109200	±0,5 °C	For 4 microtiter plates.
+5 ... 100 °C	TR100-6	Digital $\mu$	5109100	-	-	±0,5 °C	WITH SHAKING. With multiple adapters.

$\mu$ : with microprocessor.

+5: ambient +5 °C.

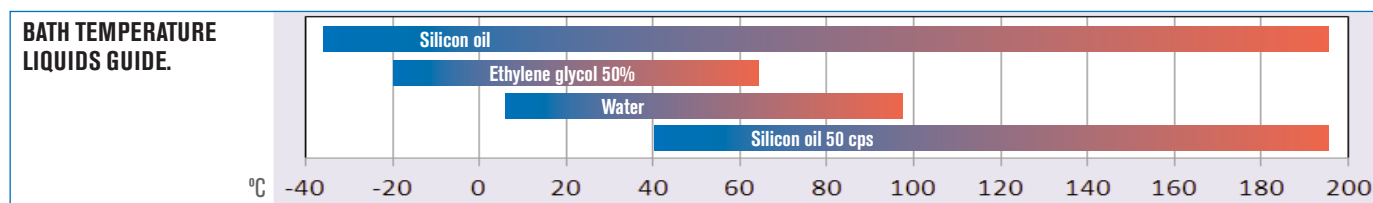



## Thermostat immersion “Termotronic II”

TEMPERATURE CONTROLLABLE FROM AMBIENT +5 °C TO 100 °C.

### SAFETY:

STANDARD DIN 12876.

SAFETY OVER TEMPERATURE THERMOSTAT WITH SIGNAL LAMP ALARM

### FEATURES

Electronic temperature control.  
Pt100 temperature sensor.  
Maximum volume to maintain maximum temperature: 20 litres. Heater elements made of INCOLOY stainless steel.  
Fitted with a stirring circulating pump.  
All parts in contact with liquids made of stainless steel AISI 304  
Fixing nut on the side.  
Minimum required tank depth: 14 cm

### CONTROL PANEL

Illuminated mains switch.  
Temperature control selector.  
Heater “on” indicator lamp.

### MODEL

Part No.	Temp. Range °C	Stability °C	Height / Width / Depth (exterior) cm	Pump Pressure / Flowrate H <sub>2</sub> O	Power W	Weight Kg
<b>3000389</b>	Amb.+5 to 100	±0.2	32* 11 16	150 mbar 5 l/min.	1000	2.5

\* Height measured with the thermometer included.

It is supplied with a thermometer.



### ACCESSORIES

#### Methacrylate tank “Clinic-Term”

Part No.	Capacity litres	Temp. max. °C	Height / Width / Depth (usable) cm	Capacity Rack	Weight Kg
<b>1000544</b>	8	60	14 16 39	4	2

Racks for the “Clinic-Term” made of AISI 304 stainless steel.

Racks for 50 micro-tubes of 11mm Ø. Part No. **1000546**

Racks for 50 haemolysis tubes and coagulation tests with a diameter of 13 mm. Part No. **1000545**

Racks for 14 tubes with a diameter of 18mm. Part No. **1000547**

Racks for 8 cuvettes for spectrophotometers, 10 mm square, standard for monotest flask of different sizes. Part No. **1000548**

Note: The methacrylate tank should not be used over 60 °C.

#### Methacrylate transparent tank.

Designed to be used with the immersion thermostat “Termotronic II”.

Part No.	Capacity litres	Temp. max. °C	Height / Width / Depth (usable) cm	Capacity Rack	Weight Kg
<b>1000397</b>	7	60	10 20 38	4	2

Rack for 24 haemolysis tubes up to 13 mm Ø, made from AISI304 S.S. Part No. **1002532**

Rack for 14 test tubes up to 16 mm Ø, made from AISI 304 S.S. Part No. **1002531**

**Metal baths.** Manufactured with a double external AISI 304 stainless steel skin and an AISI 304 stainless steel pressed bath interior.

Part No.	Capacity litres	Height / Width / Depth (usable) cm	Height / Width / Depth (exterior) cm	Weight Kg
<b>6000390</b>	9	15 29 22	20 34 28	3.5
<b>6000391</b>	12	15 30 31	20 37 35	4.3
<b>6000392*</b>	20	15 48 30	20 55 35	6.6
<b>6000393*</b>	27	20 48 30	25 55 35	7.6
<b>6001093*</b>	45	15 62 50	23 70 56	11

\* With drain tap and lifting handles.





# IMMERSION THERMOSTATS WITH DIGITAL AND TOUCH SCREEN CONTROL

*The most precise solution for maintaining constant liquid temperatures*

### SAFETY:

STANDARD DIN 12876.

ADJUSTABLE OVER TEMPERATURE SAFETY THERMOSTAT WITH MANUAL RESET AND LOW LIQUID LEVEL FLOAT SENSOR.

### COMMON FEATURES

- Temperature probe Pt 100.
- Heating element made of stainless steel INCOLOY resistant to high temperatures and corrosive environments.
- Circulation Pump for internal or external temperature control for: (Polarimeters, refractometers and viscometers, etc).
- Cooling coil to maintain ambient temperatures using tap water.
- External temperature control connection using a Pt 100 probe (see page 106).
- External metal case coated in a corrosive resistant epoxy.
- All parts in contact with liquid are made of AISI 304 stainless steel.

### PARTS THAT ARE IN CONTACT WITH LIQUID

- Safety over temperature thermostat.
- Liquid level float.
- Cooling coil.
- Heating element made of stainless steel INCOLOY that can withstand high temperatures and is corrosion resistant.
- Refrigeration coil connections.
- Pt 100 temperature probe.
- Circulation pump.
- Pump outlet for external circulation.
- Circulating pump outlet.



Outlet nut of the fluid flow fixed in A or B interchangeable:

- A. Internal stirring within the tank.
- B. External circulation.

### H<sub>2</sub>O FLOW OUTPUT

	Flow l/m
Cuvette inner circulation level	Up to 7,05
External circulation level raised to a meter.	Up to 5,16

Tests made with silicone tubes of 8 mm internal Ø.

### TWO DIFFERENT CONTROL SYSTEMS:



Digital display and



TFT touch screen.

### DIGITERM-S-150

#### Specific functions of models with digital screen:

- Real time temperature reading.
- Display resolution 0.1 °.
- Connection device for external temperature Pt100 probe.
- Permanent view of set temperature.

- Low liquid level indication.
- Heating indicator.
- Monitoring temperature: high limit / low limit.
- Automatic calibration of a point.



### DIGITERM TFT-200, ULTRATERM-TFT-200, FRIGITERM-TFT-10, FRIGITERM-TFT-30

#### Specific functions of models with touch screen:

- Acoustic and visual alarm.
- Clock and calendar.
- Single or cyclic On / Off programming.
- Up to 10 work programs.
- Up to 6 segments per program.
- Stability time in each segment (from 1 min to 99h).
- Power control program (between 10% and 100%).
- Alarms and events storage.
- Probe error detection.
- Self Diagnostics.
- Network failure detection and saving.
- Over temperature and low temperature alarms and memorization (date, start time, end time and temperature).

- Safety thermostat (TS) by software.
- Mechanic safety thermostat (TS).
- USB and RS -232 output.
- PC software.
- User manual on screen.
- Configurable parameters: Date / time, temperature correction, data collection interval, language (English, Spanish and French), °C / °F selection, over temperature and low temperature limit.
- Temperature control auto-tuning.
- Circulation pump speed control.
- 10 points automatic calibration.





## Immersion thermostat with digital control "Digiterm S-150"

ADJUSTABLE TEMPERATURE FROM AMBIENT +5°C TO 100°C.  
With external refrigeration from -20 to 100.

### High precision temperature control

#### SAFETY:

STANDARD DIN 12876. 1. SAFETY OVER TEMPERATURE THERMOSTAT WITH ADJUSTABLE MANUAL RESET  
2. OVER TEMPERATURE ALARM - 3. LOW LIQUID LEVEL FLOAT

#### FEATURES

Maximum working volume to maintain maximum temperature: 20 litres.  
A clamp and finger screw attach the unit to the tank, alternatively the extendible support bridge accessory can be used.  
Minimum fixing depth to the tank: 14 cm.  
RS-232 interface for computer control or printing data.

#### CONTROL PANEL

1. Bath temperature display indicator.
2. Set temperature display indicator.
3. Heater function light indicator.
4. Set value decrease button.
5. Set value increase button.



NEW DESIGN

REGULATION SYSTEM A

MODELS	Part No.	Control range °C	Stability °C	Height / Width / Depth (exterior) cm	Pump Pressure / Flowrate H.O	Power W	Weight Kg
DIGITERM S-150	3000543	Amb +5 to 150	±0,05	28 18 19	150 mbar-5,6 l/min.	1060	3,9

Accessories (See page. 106).



## Immersion thermostat with TFT touch screen "Digiterm TFT-200"

ADJUSTABLE TEMPERATURE FROM AMBIENT +5°C TO 200°C.  
With external refrigeration from -20 to 200.

### High precision temperature control

#### SAFETY:


STANDARD DIN 12876. 1. SAFETY OVER TEMPERATURE THERMOSTAT WITH ADJUSTABLE MANUAL RESET  
2. OVER TEMPERATURE ALARM - 3. LOW LIQUID LEVEL FLOAT

#### FEATURES

Maximum working volume to maintain maximum temperature: 20 litres.  
A clamp and finger screw attach the unit to the tank, alternatively the extendible support bridge accessory can be used.  
Minimum fixing depth to the tank: 14 cm.  
RS-232, USB and Ethernet output.

#### CONTROL PANEL

1. Set/ current temperature indicator.
2. Pump flow indicator (%).
3. Stop button.
4. Start button.
5. Push up parameter.
6. Push down parameter.
7. Ramps / cycles button.
8. Set / current time indicator in hours / minutes.
9. Return button.

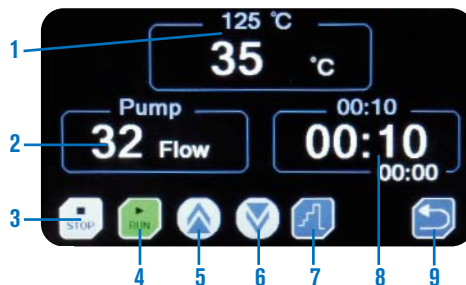

NEW DESIGN

REGULATION SYSTEM B

MODELS	Part No.	Control range °C	Stability °C	Height / Width / Depth (exterior) cm	Pump Pressure / Flowrate H.O	Power W	Weight Kg
DIGITERM TFT-200	3000544	amb.+5 to 200	at 100 °C ±0,05 at 200 °C ±0,1	28 18 19	150 mbar-5,6 l/min.	2060	4,5

Accessories (See page. 106).



## Recirculation thermostat “Ultraterm-TFT-200”

ADJUSTABLE TEMPERATURES  
FROM AMBIENT+5 °C TO 200 °C.

NEW  
DESIGN

REGULATION  
SYSTEM  
**B**

### SAFETY:

STANDARD DIN 12876. SAFETY OVER TEMPERATURE  
THERMOSTAT WITH ADJUSTABLE MANUAL RESET  
LOW LIQUID LEVEL SENSOR PROTECTION.

### FEATURES

Maximum working volume to maintain maximum temperature: 8 litres.  
AISI 304 stainless steel top and lid with an inner tank of AISI 304 stainless steel.  
Complete with a pump for internal and external liquid circulation with inlet and outlet connectors. A cooling coil to maintain ambient temperatures using tap water is also provided.

A RS-232 interface for print out or computer control comes as standard.  
A drain tap is also fitted.



### MODEL

Part No.	Capacity litres	Control range °C	Stability °C	Height / Width / Depth (usable) cm	Height / Width / Depth (exterior) cm	Pump Pressure / Flowrate H <sub>2</sub> O	Power W	Weight Kg
<b>3000545</b>	8	From amb. +5 to 200 °C With external refrigeration from -20 to 200	to 100 °C ±0.05 to 200 °C ±0.1	15 20 14	36 28 36	150 mbar-12 l/min	2060	9.5



## Refrigerated recirculation baths “Frigiterm-TFT-10” and “Frigiterm-TFT-30”

ADJUSTABLE TEMPERATURE FROM -10 °C TO 100 °C. STABILITY: 0 °C TO 100 °C, ±0.05 °C / -10 °C, ±0.1 °C.  
ADJUSTABLE TEMPERATURE FROM -30 °C TO 100 °C. STABILITY: 0 °C TO 100 °C, ±0.05 °C / -30 °C, ±0.2 °C.  
SET ERROR : ±1 °C. RESOLUTION: 0.1 °C.

NEW  
DESIGN

REGULATION  
SYSTEM  
**B**

• CFC FREE •  
• R134A •  
• R404A •

### SAFETY:

STANDARD DIN 12876. SAFETY OVER TEMPERATURE  
THERMOSTAT WITH ADJUSTABLE MANUAL RESET.  
LOW LIQUID LEVEL SENSOR PROTECTION.

### FEATURES

Maximum working volume to maintain maximum temperature: 8 litres.  
AISI 304 stainless steel top and lid with an inner tank of AISI 304 stainless steel.  
Complete with a pump for internal and external liquid circulation with inlet and outlet connectors. A drain tap is placed at the side of the unit.

A hermetically sealed compressor is mounted on anti-vibration mounts.  
A RS-232 interface for connection to a printer or computer.



### MODELS

	Part No.	Capacity litres	Control range °C	Height / Width / Depth (usable) cm	Height / Width / Depth (exterior) cm	Pump Pressure / Flowrate H <sub>2</sub> O	Power W	Compressor power H.P.	Weight Kg
<b>FRIGITERM-10</b>	<b>3000546</b>	8	-10 + 100	12 20 14	36 66 44	150 mbar-12 l/min	1150	1/8	28
<b>FRIGITERM-30</b>	<b>3000547</b>	8	-30 + 100	12 20 14	36 66 44	150 mbar-12 l/min	1460	3/8	30



## PRECISE CIRCULATING BATHS

### Choice of baths and immersion circulators “Digiterm-S-150” and “Digiterm-TFT-200”

CONTROLLABLE TEMPERATURES FROM AMBIENT +5 °C TO 150 OR 200 °C.  
CAPACITY FROM 20 TO 27 LITRES.





#### APPLICATIONS

Incubation processes, Enzymatic reactions, Fermentation, laboratory cultures in general.

#### COMMON FEATURES


Double skinned baths with an AISI 304 stainless steel internal tank with an AISI 304 stainless steel external, for convenience, handles at the side and drain tap are provided as standard. A detachable immersion thermostat for controlling stirring and temperature is fitted. A cooling coil with the use of tap water or cooled re-circulator can be used to maintain ambient temperatures. Internal or external circulation pump (Polarimeters, refractometers and viscometers, etc)

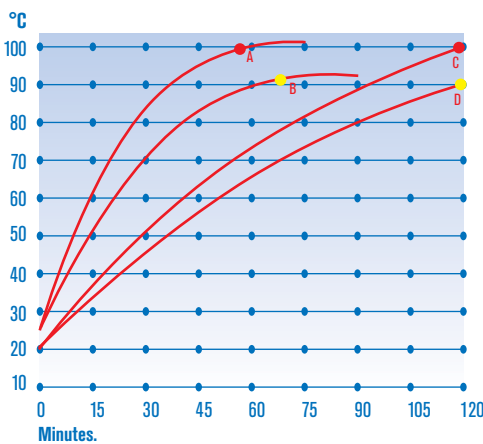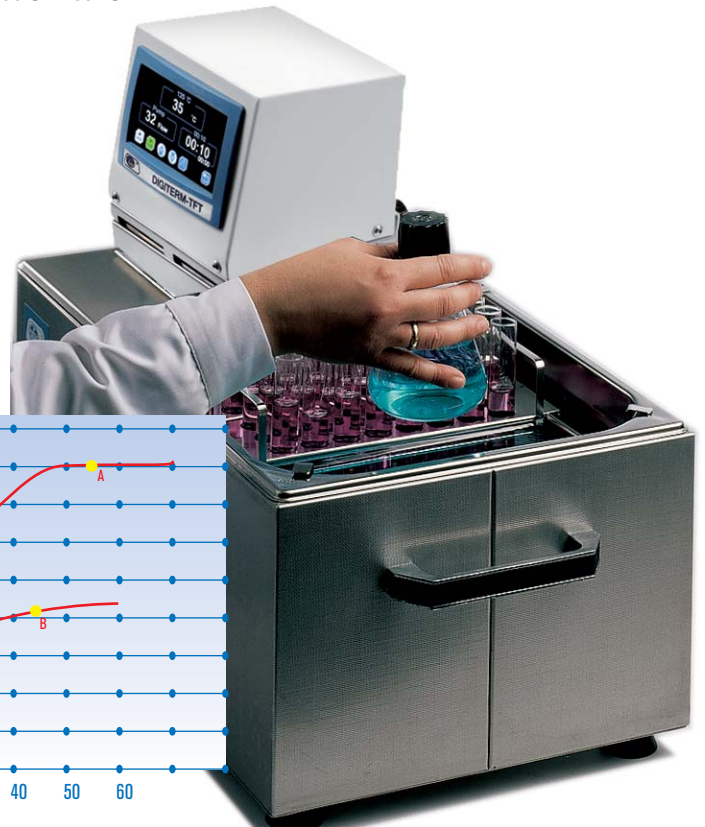

Graph of temperature and time for the Tectron Bio 100 and Digiterm-S-100 and Digiterm-TFT-200, units with capacity of 20 litres.

Tests completed with water up to 100°C:

- A. Digiterm-TFT-200 with lid at 100 °C.
- B. Digiterm-TFT-200 no lid at 90 °C.
- C. Digiterm-S-100 with lid at 100 °C.
- D. Digiterm-S-100 with no lid at 90 °C.

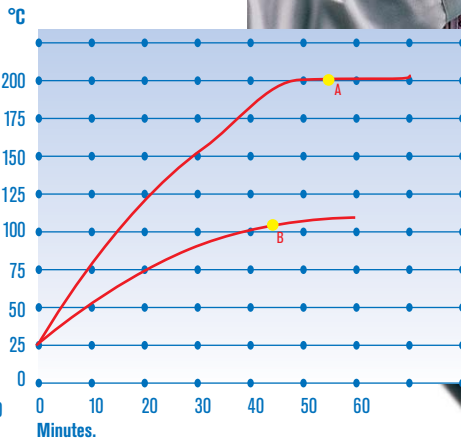

Graph of temperature and time for the Digiterm 100 and 200, units with capacity of 20 litres.

Tests completed with Silicon oil up to 200°C:

- A. Digiterm-TFT-200 with lid at 200 °C.
- B. Digiterm-TFT-200 with lid at 100 °C.

27 litres capacity baths take 20% more time to reach the same temperature.



## Bath circulators “Digiterm-S-150”

CUVETTES SET OF 20 AND 27 L. CAPACITY, WITH THERMOSTATIC EQUIPMENT INCLUDED.  
FURTHER TEMPERATURES FROM AMBIENT +5 TO 150 °C.  
STABILITY: ±0.05 °C. RESOLUTION: 0.1 °C.



**SAFETY:**  
SAFETY STANDARD DIN 12876.  
SAFETY ADJUSTABLE OVER TEMPERATURE CUT OFF WITH MANUAL RESET.  
LOW LIQUID LEVEL CUT OFF.



MODELS	Part No.	Temperature Range °C	Cuvettes Capacity litres	Height / Width / Depth (interior) cm	Height / Width / Depth (exterior) cm	Pressure mbar	Pump Pump rate l/min	Power W	Weight Kg
DIGITERM-S-150-20	3000548	150	20	15 30 29	36 55 35	150	12	1060	9.2
DIGITERM-S-150-27	3000549	150	27	20 30 29	41 55 35	150	12	1060	10.8

ACCESSORIES see page 106.



## Bath circulators “Digiterm-TFT-200”

WITH IMMERSION THERMOSTAT DIGITERM-TFT-200.

CUVETTES SET OF 20 AND 27 L.

FROM AMBIENT +5 °C TO 200 °C. STABILITY  $\pm 0.1$  °C. SET ERROR  $\pm 2$  °C. RESOLUTION 0.1 °C.

NEW DESIGN



**SAFETY:** CONFORMS TO THE DIN 12876. STANDARD. ADJUSTABLE OVER TEMPERATURE SAFETY CUT OFF WITH ADJUSTABLE MANUAL RESET. LOW LIQUID LEVEL CUT OFF. ELECTRICAL FAULT ALARM.

### FEATURES

Temperature sensor probe Pt 100.

Heating element made of stainless steel INCOLOY, resistant to high temperatures and corrosive environments.

Circulation pump with flow rate, suitable for external temperature control for: (Polarimeters, refractometers, viscometers, etc).

Cooling coil to maintain ambient temperatures, using tap water.

External temperature control connection using a Pt 100 probe (see page 106).

External metal case with a corrosion resistant epoxy coating.

All parts in contact with liquid are made of AISI 304 stainless steel.

Handles at the side and drain tap.



MODELS	Part No.	Temperatura Range °C	Cuvettes Capacity litres	Height / Width / Depth (interior) cm	Height / Width / Depth (exterior) cm	Pressure mbar	Pump Pump rate l/min	Power W	Weight Kg
TFT-200 20	3000550	200	20	15 30 29	36 55 35	150	12	2060	10
TFT-200 27	3000551	200	27	20 30 29	41 55 35	150	12	2060	12

ACCESSORIES see page 106.

ACCESSORIES for the DIGITERM-S-150 and DIGITERM-TFT-200. Made of AISI 304 stainless steel.



1. Gable lid. Part No. 3001295
2. Lifting rack support. Capacity 3 tube racks. Part No. 1001296
3. Tube racks for lifting rack support.

Part No.	For Ø tubes mm	Capacity Rack tubes	Height/Width/Depth (exterior) cm
1001202	13	36	8 8.2 23.6
1001203	16	24	8 8.2 23.6
1001204	20	24	8 8.2 23.6



## Immersion thermostat for baths “Digit-Cool”

DIGITAL SELECTOR AND TEMPERATURE CONTROL ADJUSTABLE FROM 0 °C TO 100 °C.

STABILITY: 100 °C  $\pm 0.1$  °C, AND AT 0 °C  $\pm 0.05$  °C. SET ERROR:  $\pm 0.1$  °C. RESOLUTION: 0.1 °C.

**SAFETY:** STANDARD DIN 12876. SAFETY OVER TEMPERATURE THERMOSTAT WITH ADJUSTABLE MANUAL RESET. LOW LIQUID LEVEL SENSOR PROTECTION.

### FEATURES

Maximum volume to achieve the working temperature: 20 litres.

Minimum depth of the elements with contact with the liquid: 15 cm.

Hermetically sealed compressor.

RS-232 out put to a computer control or printer.

Portable control and stirring unit with lifting handle.

### CONTROL PANEL

Main power switch.

LCD Display showing working parameters.

Push button configuration selector.

Push button parameter selection.

Push button increase/decrease set value.

Start / Stop, push button.

### MODEL

Part No.	Control Range °C	Height / Width / Depth (exterior) cm	Pump Pressure / Flow H <sub>2</sub> O	Power W	Power H.P.	Weight Kg
3001373	0 +100	45 21 51	150 mbar / 12 l/min	1460	1 / 5	22

ACCESSORIES See page 106.

Autonomous unit with cooling system

Compressor unit built-in



Digitcool thermostat with bath and 4 place ring set lid.





**ACCESSORIES for thermostatic unit digit-cool.**

**Stainless steel baths.**

Double skinned with an AISI 304 stainless steel exterior with a bath of AISI 304 stainless steel interior. Supplied with a drain tap and lifting handles.



**MODELS**

Part No.	Capacity litres	Height / Width / Depth (usable) cm	Height / Width / Depth (exterior) cm	Weight Kg
<b>6000392</b>	20	15 48 30	20 55 35	6.6
<b>6000393</b>	27	20 48 30	25 55 35	7.6



**1. Lifting rack support.**

Capacity 3 tube racks. Part No. **1001296**

**2. Tube racks for lifting rack support.**

Part No.	For Ø tubes mm	Capacity Rack tubes	Height / Width / Depth (exterior) cm
<b>1001202</b>	13	36	8 8.2 23.6
<b>1001203</b>	16	24	8 8.2 23.6
<b>1001204</b>	20	24	8 8.2 23.6



Ring set lid 105, 80, 60 and 37 mm Ø reduction rings and a check thermometer location hole in the lid. Capacity 4 places.

Part No. **1001374**

*Digitcool thermostat with bath and 4 place ring set lid.*

**ACCESSORIES FOR IMMERSION THERMOSTATS**



**Pt100 temperature sensor with handle**

4 mm Ø x 135 mm long submersion.

Supplied with a 150cm cable and connector.

Part No. **1000893**



**Extension support bridge.**

Made of AISI 304 stainless steel, adjustable, to fit the immersion thermostat models "Tectron" and "Digiterm".

Support for apertures from 22 to 44 cm across.

Part No. **6001092**



*Example showing the support bridge. Part No. 6001092.*

**Stainless steel baths.**

Double skinned with an AISI 304 stainless steel exterior and internal bath of AISI 304 stainless steel.

**MODELS**

Part No.	Capacity litres	Height / Width / Depth (usable) cm	Height / Width / Depth (exterior) cm	Weight Kg
<b>6000390</b>	9	15 29 22	20 34 28	3.5
<b>6000391</b>	12	15 30 31	20 37 35	4.3
<b>6000392*</b>	20	15 48 30	20 55 35	6.6
<b>6000393*</b>	27	20 48 30	25 55 35	7.6
<b>6001093*</b>	45	15 62 50	23 70 56	11

\* With drain tap and lifting handle.

**Stainless steel baths, thermally insulated.** Ideal for low temperatures. Suitable for J.P. Selecta refrigerated units. Similar to our other bath but with additional internal expanded foam insulation that prevents external condensation or heat loss, working temperature range from -40°C to +90°C.

**MODELS**

Part No.	Capacity litres	Height / Width / Depth (usable) cm	Height / Width / Depth (exterior) cm	Weight Kg
<b>6003901</b>	9	15 29 22	24 40 34	6
<b>6003921*</b>	20	15 48 30	24 61 41	9
<b>6003931*</b>	27	20 48 30	29 61 41	11

\* With drain tap and lifting handles.



**Methacrylate baths. Maximum temperature 60 °C.**

**MODELS**

Part No.	Capacity litres	Height / Width / Depth (usable) cm	Thickness mm
<b>1000394</b>	8	15 18 31	6
<b>1000544</b>	9,5	14,5 16,5 39	6
<b>1000395</b>	13	15 23 40	8
<b>1000396</b>	30	20 30 50	8



**Removable constant liquid level.** Suitable for any type of bath. Adjustable height to obtain the required liquid level.

Part No.

**6001400** Bath depth up to 15 cm.

**6001800** Bath depth up to 20 cm.



**Thermometer support.** Stainless steel, suitable for thermometer. Fixation aperture up to 40 mm.

Part No. **6000896**

**Thermometer.**



**Suitable for "Tectron-Bio" immersion thermostat.** Scale -20 to 100 °C.

Part No. **3009100**



## Refrigerated cooling coils for baths “Frigedor” and “Frigedor-Reg”

TEMPERATURES FROM -20 °C TO +20 °C.

### APPLICATIONS

Designed for bath and tank applications that require below ambient temperatures.

### COMMON FEATURES


The unit is bench mountable and contains within the epoxy coated case a CFC free hermetically sealed compressor with condenser and evaporator, the cooling coil is made of AISI 304 stainless steel.

### COIL DIMENSIONS

Refrigerated immersion length: 900 mm.

Cooling coil Ø: 45 mm.

Coil length: 150 mm.

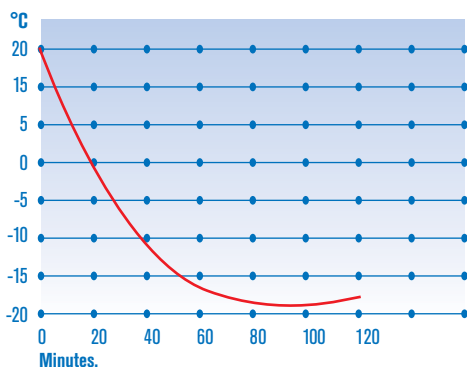

Graph showing the cooling performance of the 8 litre H<sub>2</sub>O “Frigedor” With insulated stirring tank.

### MODEL FRIGEDOR

No temperature controller incorporated. Continually operates the compressor.

### CONTROL PANEL

Mains switch with “ON” indicator lamp.

### MODEL FRIGEDOR REG

Equipped with a temperature controller with digital control and display. Includes a Pt 100 temperature probe. Resolution: 1 digit.

### CONTROL PANEL

Mains switch with indicator “ON” lamp. Digital temperature controller with push buttons, connector for the Pt 100 temperature probe. (See page 106).



MODELS	Part No.	Temperature range °C	Stability °C	Height / Width / Depth (exterior) cm	Cooling potential	Power W	Weight Kg
FRIGEDOR	3000778	-20 to +20	-	41 21 34	to -20 °C = 50 W	285	14
FRIGEDOR-REG	3001214	-20 to +20	±1.5	41 21 34	to -20 °C = 50 W	285	14

We recommend our thermally insulated baths (see page 106).



## Water recirculators “Interheater”

FROM AMBIENT +5°C TO 90°C .

**SAFETY: STANDARD DIN 12876. OVER TEMPERATURE SAFETY ADJUSTABLE THERMOSTAT WITH MANUAL RESET.**

### DESCRIPTION

Water circulation unit, designed to feed closed water loop circuits for condensers, distillation columns, reactor jackets, viscometers, electrophoresis baths etc. designed specifically for:

- Constant temperature.
- Constant pump rate of refrigerated fluid.
- Closed loop circuit, avoids the build up of scale in cooling coils, and cooling circuits.

### FEATURES

Digital electronic temperature regulation.

Circulation flow: 20 L/min.

Inox covered steel case.

RS-232, USB and Ethernet output for recording tem-

peratures.

Hose connectors Ø 12mm internal.

230V single phase.

INTERHEATER Heating power 2 or 4 KW control panel selectable.

### CONTROL PANEL

Mains switch.

Digital temperature control.

Pressure gauge.

Water level in the reservoir.

“Autotuning” function for optimizing the temperature control of each facility.

Supports 9 programmable temperature profiles including temperature ramps and steps.

### MODEL

Part No.	Height / Width / Depth (exterior) cm	Regulation range °C	Power W	Weight Kg
6001491	70 43 56	5 to 90	4100	22

### ACCESSORY

Roll of 25 m of reinforced silicone hose.

Part number 1001540





## THERMOSTAT DRY-BLOCKS

WITH DIGITAL ELECTRONIC CONTROL OF TEMPERATURE AND TIME

**SAFETY: CONFORMS TO EN 61010 DIRECTIVE, OVER TEMPERATURE CUT OUT SYSTEM.**

*High precision. Free from contamination.*

### APPLICATIONS

Clinical, biochemical and chemical laboratories. Incubation of DNA, enzyme assays, residual testing in dairy, incubation and fusion of AGAR, cell culture. Thermo control to dry, boiling, evaporation, concentration, hydrolysis, digestion etc.

### COMMON FEATURES

Dry block systems have several advantages over wet contact methods such as: no risk of evaporation of heating liquid, higher working temperatures, better long term temperature stability and no sample cross contamination or germination of bacteria in the bath. Digital temperature calibration. Timer from 1 to 999 mi

utes or continuous operation. Over temperature alarm. Heating elements are distributed evenly across the contact surface maintaining an even distribution of heat.

Easy to use digital temperature and time control with a digital display (3 Digits).

Built in temperature sensor Pt 100.

Interchangeable blocks made of anodised DURAL alloy to accommodate a variety of tube diameters.

(Customer specific sizes also available.)

External case made of epoxy covered steel with an AISI 304 stainless steel top.



1 2 3 4 5 7 6

### CONTROL PANEL

1. Digital display showing temperature and time in minutes.
2. Indicator show displayed parameter (Time or temperature.).
3. Push button selector to show time or temperature.
4. Push button increase displayed value.
5. Push button decrease displayed value.
6. Push button Start / Stop.
7. Over temperature alarm indicator.



## Dry block heater for tubes "Tembloc"



### ACCESSORIES

**Metal blocks**, size: 105 Ø x 55 mm high.

Part No.

**7000346** for 34 x 6 mm Ø tubes

**7000714** for 18 x 1.5 ml. Eppendorf tubes

**7001224** for 24 x 12 mm Ø tubes.

**7001618** for 18 x 16 mm Ø tubes.

**7000208** for 8 x 20 mm Ø tubes.

**7000256** for 6 x 25 mm Ø tubes.

**7000715** Blank block with no holes for customized demand.

### MODEL


Part No.	Temperature °C	Stability °C	Homogeneity %	Set error %	Resolution °C	Height / Width / Depth (exterior) cm	Power W	Weight Kg
<b>7462200</b>	30 - 200	±0.75	±1.5	±2	1	11 19 29	350	3.7

Supplied complete with thermometer 0-200 °C and extraction tool for blocks.



## Dry Block heater for tubes "Multiplaces"

**CAPACITY: THREE BLOCKS.**

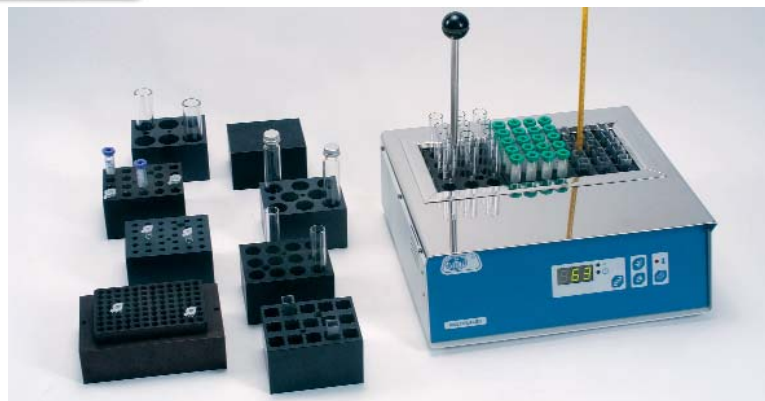

### ACCESSORIES

**Metal Blocks:** 55 high x 95 wide x 75 mm deep.

Part No.

**7000306** For 30 x 6 mm Ø tubes (total 3 blocks = 90 tubes).

**7000716** For 20 x 1.5ml, Eppendorf tubes. (total 3 blocks = 60 tubes.)

**7031220** For 20 x 12 mm Ø tubes (total 3 blocks = 60 tubes).

**7031612** For 12 x 16 mm Ø tubes (total 3 blocks = 36 tubes).

**7003208** For 8 x 20 mm Ø tubes (total 3 blocks = 24 tubes).

**7001256** For 6 x 25 mm Ø tubes (total 3 blocks = 18 tubes).

**7000717** Blank block without holes, can be customised to customer requirements.

**7001474** Block for 15 cuvettes 10 x 10. Capacity: 3 blocks.

**7001475** Block for 96 well microplates of 1.2 ml. Capacity: 1 block.

### MODEL

Part No.	Temperature °C	Stability °C	Homogeneity %	Set error %	Resolution °C	Height / Width / Depth (exterior) cm	Power W	Weight Kg
<b>7471200</b>	30 - 200	±0.75	±1.5	±2	1	11 31 31	700	7.4

Supplied complete with thermometer 0-200 °C and extraction tool for blocks.



## Metallic thermostat dry block “Clinic-Bloc” and “Bio-Bath”

FIXED TEMPERATURE OF 37 °C WITH CHECK THERMOMETER.

**SAFETY: NORM EN 61010. OVER TEMPERATURE CUT-OUT FITTED.**

### “CLINIC-BLOC”

Capacity 20 tubes (5x4) of 75x13 mm. VAC. Part No. **7001569**

### “CLINIC-BLOC” 1537

Capacity 15 cuvettes (5x3) of 10x10 mm. Part No. **7001570**

#### MODEL

Part No.	Height / Width / Depth (exterior) cm	Stability °C	Power W	Weight Kg
<b>7001569</b>	11 18 28	±0.5	10	2.4
<b>7001570</b>	11 18 28	±0.5	10	2.4

### “BIO-BATH”

Capacity 8 tubes (5x4) of 75x13 mm VAC.

#### MODEL

Part No.	Height / Width / Depth (exterior) cm	Stability °C	Power W	Weight Kg
<b>7001561</b>	8.8 9.6 7	±0.5	8	0.5



For VAC tubes (75x13)  
Part No. 7001569



For cuvettes (10x10)  
Part No. 7001570



**OPTIC  
ivymen<sup>®</sup>  
SYSTEM**



## Thermo shaker “TRM-4” for Microtiter plates

WITH ELECTRONIC CONTROL AND DIGITAL DISPLAY OF TEMPERATURE, SHAKING SPEED AND TIME.  
FOR TEMPERATURES FROM AMBIENT +5 °C. TO 60 °C. STABILITY ± 0,5 °C.

#### APPLICATIONS

For clinical analysis, immunology and nutritious quality control use.

#### FEATURES

External ABS case with a platform for heating and shaking 2-4 96-well Microtiter plates.

Upper lid with aluminium plate coated inside, and simultaneous heating system to the main platform.

Digital display of current and set point temperature, time and shaking speed parameters.

Acoustic and luminous indications at the end of the cycle and due to malfunction in temperature or time programmed.

A built-in motor generates a uniform movement depending on the speed programmed, protected to over temperature with auto switch off and switch on activation.

Temperature calibration to meet the user's needs.

Protection device for over temperature that provides safety and reliability.

#### CONTROL PANEL

LCD display indicating temperature, speed in r.p.m. and time.

Push button SET to program temperature, speed in r.p.m. and time.

Push button ▲ increase value.

Push button ▼ decrease value.

Push button START / STOP for starting and stopping the shaking system.

Push button OFF for any function.

#### SPECIFICATIONS

Temperature: Ambient +5°C to 60°C.

Heating time: ≤23 min (to 60°C).

Shaking range: 100-1200rpm.

Orbital rotation: 2mm.

Timer: From 1 min. to 99h. 59 min.

#### MODEL

Part No.	Temperature °C	Stability °C	Block homogeneity °C	Height / Width (platform) cm	Height / Width / Depth (exterior) cm	Power W	Weight5 Kg
<b>5109200</b>	ambient +5 to 60	±0,5	±0,5	21,5 30	18 40 39	132	9.5



Cover inner plate with  
heating system.

**NEW  
DESIGN**





## APPLICATIONS

Wide applications of TR100-G for DNA analysis, lipids and other cellular components extraction, DNA libraries creation, DNA amplification, electrophoresis pre-denaturation, serum solidification, etc.

## FEATURES

External ABS case with multiadapter device for different blocks depending on the analysis to be made.

Digital display of current and set point temperature, time and shaking speed parameters. Acoustic and luminous notification at the end of the cycle and due to malfunction in temperature or time programmed.

A built-in motor generates a uniform movement depending on the speed programmed, protected to over temperature with auto switch off and switch on activation.

Temperature calibration to meet the user's needs.

The thermostat includes a heater platform to adapt multiple blocks, depending on the analysis to be made.

Protection device for over temperature that provides safety and reliability.



## CONTROL PANEL

LCD display indicating temperature, speed in r.p.m. and time.

Push button SET to program temperature, speed in r.p.m. and time.

Push button ▲ increase value.

Push button ▼ decrease value.

Push button START / STOP for starting and stopping the shaking system.

Push button OFF for any function.

## SPECIFICATIONS

Temperature: Ambient +5°C to 100°C.

Heating time: ≤23 min (to 100°C).

Shaking range: 200-1500rpm.

Orbital rotation: 2mm.

Timer: From 1 min. to 99h. 59 min.

## MODEL

Part No.	Temperature °C	Stability °C	Block homogeneity °C	Height / Width / Depth (exterior) cm	Power W	Weight Kg
<b>5109100</b>	ambient +5 to 100	±0,5	±0,5	18 21 30	88	9.5

## ACCESSORIES

ABS coated **metallic blocks** adapted to TR100-G thermostat by means of fixing screws to the block. Easy to clean and autoclavable.

For 24 tubes of Ø 11mm.  
Depth: 30 mm.  
Part No. **5109101**

For 12 tubes of 15 ml.  
Ø Up to 15 mm.  
Depth: 100 mm.  
Part No. **5109102**

For 6 tube of 50 ml.  
Ø Up to 28 mm.  
Depth: 100 mm  
Part No. **5109103**

For 96 microtubes of 0,2 ml.  
with polypropylene lid.  
Part No. **5109104**

For 54 microtubes of 0,2 ml.  
with polypropylene lid.  
Part No. **5109105**

For 15 microtubes of 0,5 ml.  
and 20 microtubes of 1,5 ml.  
with polypropylene lid.  
Part No. **5109106**

For 35 microtubes of 1,5 ml.  
with polypropylene lid.  
Part No. **5109107**

For 35 microtubes of 2 ml.  
with polypropylene lid.  
Part No. **5109108**

**Thermocycler for thermal cycles "B960" See page 238.**