


CENTRIFUGES ELECTRONIC DIGITAL CONTROL “Centrolit II-BL”, “Centro-4-BL”, “Centro-8-BL”, With induction drive maintenance free motor.



SAFETY:
UNE-EN 61010.2.020. ELECTROMAGNETIC LID LOCK, PREVENTS THE OPENING OF THE CENTRIFUGE IF THE ROTOR IS IN MOTION.
PREVENTS THE STARTING OF THE MOTOR IF THE LID IS OPEN. ROTOR AND BUCKETS ARE IDENTIFIED BY LASER SIGNAL.
AUTOCLAVABLE.

COMMON FEATURES

- Electronic control with digital display of speed and time, with acceleration and brake ramp.
- Timer controllable from 1' to 60' or continuous operation.
- Rubber suspended motor that guarantees a smooth operation.
- Digital speed display.
- Pulse button, that drives the motor while pressed.
- Automatic stop if out of balance, with indicator light.
- Suction base supports that adhere to the work bench surface.
- Quiet operation, insulated interior that absorbs noise and vibrations.
- In the case of mains failure, manual open override aperture.
- Noise level 50-60dBA.
- Rotors and buckets with laser identification.**
- Autoclavable.**

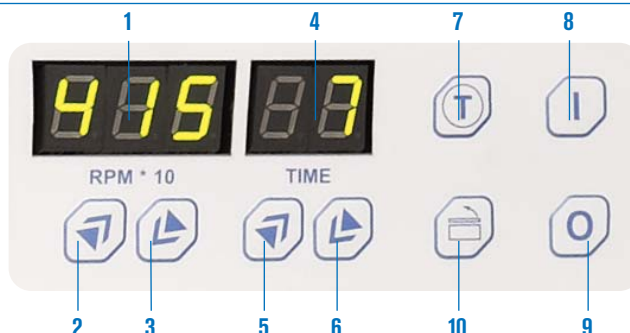

CONTROL PANEL

- | | |
|--|--|
| <ul style="list-style-type: none"> 1. Speed display. 2. Push button increase speed. 3. Push button reduce speed. 4. Run Time display. 5. Push button increase run time. | <ul style="list-style-type: none"> 6. Push Button decrease run time. 7. Push button pulse start (RUN/STOP). 8. Push button start. 9. Push button stop. 10. Push button open lid. |
|--|--|



Centrifuge “Centrolit II-BL”

SUITABLE FOR HAEMATOCRIT AND SMALL VIALS OF 0.25/0.5 ml AND TUBES OF 1.5/2.2 ml.
FREE MAINTENANCE INDUCTION DRIVE MOTOR.



ABS plastic moulded external case.

MODEL

Part No.	Max. Volume ml	Max. Number of tubes	Height / Width / Depth (exterior) cm	Power W	Weight Kg
7002357	66.6	18 x 1.5 / 2.2 ml	20 28 34	200	6.5

SPARES. Tubes (see page 132).

ACCESSORIES

Interchangeable rotors made of hardened anodised aluminium. Autoclavable.

Part No. head	Rotor type	Volume rotor	Tube capacity maximum	Max. R.p.m.	Max. R.c.f. (xg)
7001704	Micro-haematocrit	-	24 x 1.4 mm Ø	12000	13143
7001703	Angle+lid	40.5 ml	18 x 0.25/0.5 ml + 18 x 1.5/2.2 ml	12000	14103
7001702	Angle PCR	6,4 ml	32 x 0.2 mm Ø	12000	12500

Angle rotors supplied without tubes.

Micro-haematocrit rotor supplied with one box of 100 tubes.



Micro-haematocrit reader.
Suitable for micro-haematocrit rotor 7001704.
Part No. **7000929**