



BACTERIOLOGICAL INCUBATORS

PREMIER
SERIE



Bacteriological incubators "Incubat"

NATURAL CONVECTION.
TEMPERATURE THERMOSTAT CONTROL WITH ANALOGUE THERMOMETER.
ADJUSTABLE TEMPERATURES FROM AMBIENT +5 °C UP TO 80 °C.
STABILITY: ± 0.1 °C, UP TO 37 °C. HOMOGENEITY: ± 0.5 °C, UP TO 37 °C
INTERNAL GLASS DOOR.


FEATURES, CONTROL PANEL, STANDARD AND ACCESSORIES (see pages 139 and 140).

SAFETY:

OVER TEMPERATURE CUT OUT INCORPORATED ACCORDING TO THE EN.61010 STANDARD.
ADJUSTABLE SAFETY THERMOSTAT DIN 12880. FITTED.



Horizontal model. Part No. 2001615

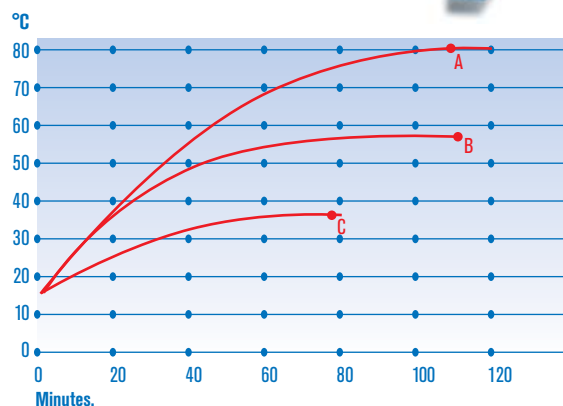

STANDARD EQUIPMENT

2 shelves and 4 shelf guides.

MODELS

Part No.	Capacity litres	Height / Width / Depth (interior) cm	Height / Width / Depth (exterior) cm	Shelves positions	Power W	Weight Kg
2000205	19	30 25 25	51 57 49	5	165	26
2000206	36	40 30 30	60 62 54	7	245	36
2001615	52	33 47 33	53 79 57	5	275	46
2000207	80	50 40 40	70 72 64	8	315	54
2000994	150	50 60 50	70 92 74	8	535	78

Performance graph of temperature and time.

A. Set at 80 °C: 1 h 54'.

B. Set at 56 °C: 1 h 46'.

C. Set at 37 °C: 1 h 18'.

ACCESSORIES

Accessories must be factory installed.



Part No. **2000003** Timer switch
0-12 hours.



2000009 24 hour programmer with continuous on/off cycling up to every 15 minutes.

SPARES

Shelves and guides.

Oven Part No.	2000205	2000206	2001615	2000207	2000994
Set guides (2 units)	2000011	2000012	2000012	2000013	2000015
Shelves	2000021	2000022	2000024	2000023	2000025

Each shelf requires two guides (one set).